


DESCRIPTION	SeceuroGlide Original remote control insulated roller garage doors are manufactured from foam-filled aluminium slats and operated by key fob transmitters as standard. They are designed to require minimal headroom above the opening and are fully CE compliant and safety tested.		<p>Secured by Design</p>  <p>Official Police Security Initiative</p>  <p>Assessed to ISO 9001 & ISO 14001 Cert/LPCB ref. 390</p>
	When fitted with 90mm guide rails in internal face fitment, SeceuroGlide Original is tested and approved to Police and Insurance standards, certified to the Loss Prevention Certification Board's LPS 2081: Issue 1 burglary resistance standard and awarded 'Secured by Design' status by ACPO Crime Prevention Initiatives Ltd.		

DOOR DIMENSIONS	Minimum:	Maximum:	
	Overall Guide Width:	1500mm	5590mm
	Guide Height:	1900mm	3700mm
		<i>At this height the maximum width is restricted to 4000mm</i>	
HEADROOM REQUIRED	300mm <i>Up to 2500mm opening height</i>	350mm <i>Up to 3700mm opening height</i>	

CURTAIN	
	<p>CD77 twin-walled aluminium slat, insulated with CFC-free foam to reduce heat loss and sound transmission.</p> 




DIMENSIONS	Nominally 78.5mm high x 19mm thick.
WEIGHT	5kg per square metre.
	<p>Slats are held in place with high performance nylon webbing.</p> <p>For additional strength SeceuroGlide Original features a 77mm extruded aluminium bottom slat which incorporates a 25mm rubber seal to help prevent water ingress and draughts.</p>  

STANDARD COLOURS	<p>Anthracite, Black, Brilliant White, Brown, Burgundy, Chartwell Green, Fir Green, Ivory, Light Beige, Light Grey, Navy Blue, Silver Metallic</p> <p>5 <i>All come with a 5-year guarantee on the finish of the door.</i></p>
TEXTURED WOODGRAIN COLOURS SURCHARGE	<p>Golden Oak, Mahogany, Rosewood, White Woodgrain, Black/Brown Woodgrain</p> <p>10 <i>All come with a 10-year guarantee on the finish of the door.</i></p>

AXLE ASSEMBLY	
CONSTRUCTION	<p>100mm galvanised steel fluted axle with plastic locking collar with aluminium top slat hinges.</p>  <p>Steel endplates. As the door closes, the bolt engages with the end plate's locking block to secure the door.</p> <p>Available as White or Brown as standard. Other colours available at a surcharge.</p> 

MOTOR		SeceuroDrive	Somfy
	Tubular Motor	✓	✓
	Manual Override	✓	✓
	Warranty	7-years <small>Requires customer registration</small>	5-years
	Speed	15RPM <small>12RPM for larger doors</small>	17RPM <small>12RPM for larger doors</small>
	Surcharge	✗	✓

GUIDE RAILS	
DESCRIPTION	Extruded aluminium with dense brush strip insert for improved insulation.
STANDARD COLOURS	Available in White, Brown and Fir Green as standard. Other colours available at a surcharge.

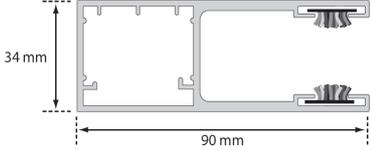DIMENSIONS	<p>Doors up to 4600mm wide supplied with 75mm wide x 34mm deep as standard.</p> 	<p>Doors over 4600mm wide supplied with 90mm wide x 34mm deep as standard.</p> 
CONTROL		
	<p>SeceuroSense Plus or Somfy Rollixo remote receiver unit both with Integral LED courtesy light and two key fob transmitters with rolling code technology.</p>	
SAFETY	<p>Both remote control systems units supplied with a bottom slat safety edge which is pressure sensitive device as standard, available as hardwired or wireless. All doors are supplied with anti-fallback safety device.</p>	
SHUTTER BOX		
	<p>Supplied with 90° fascia as standard with optional 45° lid available at a surcharge.</p> <p>Roll formed aluminium in either one or two sections (90° fascia and 45° lid).</p>	<p>Optional Box 'Distance A' = 300 mm 'Distance B' = 350 mm*</p>  <p>* 90° section of 350 mm box comes in 2 parts</p>
STANDARD COLOURS	<p>Available in White or Brown as standard. Other colours available at a surcharge.</p>	

INSTALLATION


OPTIONS

SeceuroGlide Excel must always be installed by a trained installer and in accordance with the specified fitting criteria (as stated in the installation instructions).

In order to meet LPS 2081 certification requirements, the door must be face fitted internally with 90mm guide rails. Both the guide channels and box assembly must be fully hidden behind the structure. The product should only be installed to brick, block work, structural steel or structural timber.


FACE FIX - INTERNAL

- Installed inside the opening.
- The inside edge of the guide rails line up with the brick opening.
- Ideal where headroom inside the garage isn't seriously restricted.
- Internal reveal fixing may be used to great effect in arched openings.

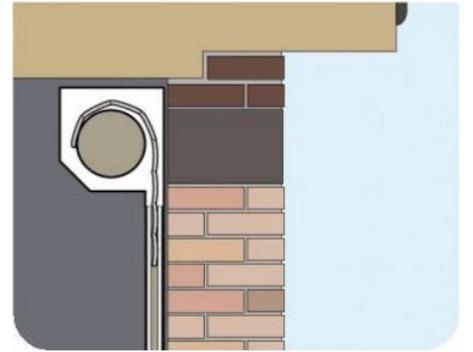


FACE FIX - EXTERNAL

- Installed outside the opening.
- Ideal where headroom is particularly restricted.
- Requires full box option for weatherproofing.

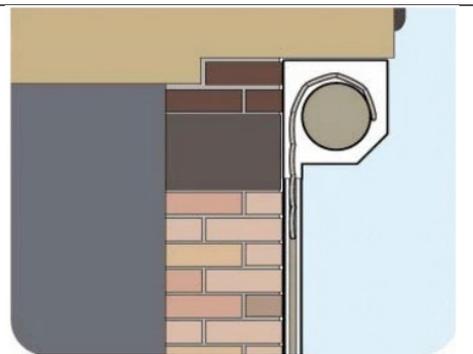

REVEAL FIX

- Installed within the opening itself.
- Maximises internal space in the garage whilst not obscuring the exterior of the garage.
- Requires good reveal headroom.
- Reduces with drive through width of the door by the width of the guide rails.

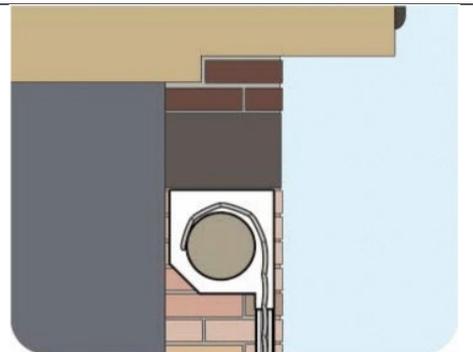

All SeceuroGlide Original doors come with an Operating & Maintenance manual and handover video for the end user.

Manufactured by SWS UK, Cloughton, Lancs, LA2 9LA.



ACCESS
& SECURITY SYSTEMS LTD

Incorporating Abbey Garage Doors

TEL: 01189 817 300

info@rollergaragedoorscentre.co.uk

www.rollergaragedoorscentre.co.uk

Showroom: Unit 7 Bacchus House, Calleva
Park, Aldermaston, RG7 8EN